



SP60/54 - Solid Parabola, 60 cm, 28 dBi



type	solid parabola 60 cm
polarisation	linear, mounting in steps of 45°
frequency	5470-5875 MHz
impedance	50Ω
VSWR	≤1.7:1
gain	28 dBi
HPBW	7° (E- and H-plane)
F/B	>40 dB
cross polarisation	>25 dB
connector	N female
power handling	20 W
diameter	610 mm
depth	150 mm excl mounting bracket 250 mm incl mounting bracket
weight	2.5 kg incl mounting bracket
material	reflector - 2 mm aluminium feeder - white PP radome mount - aluminium, stainless steel
color	white
mount	mounting hardware fits 35-50 mm mast tubes

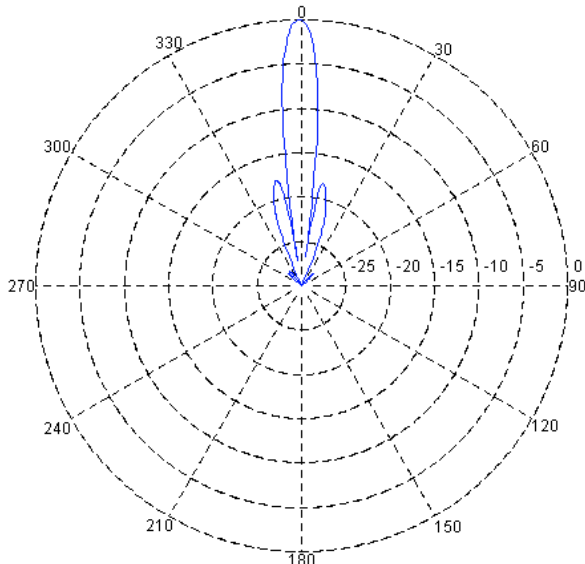

H-field radiation pattern, ie azimuth for vertically polarised antenna.

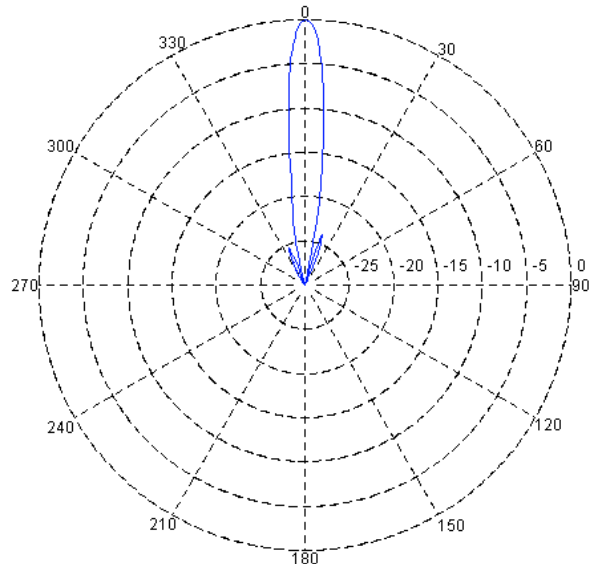

E-field radiation pattern, ie elevation for vertically polarised antenna.